


GFCV UNIDIRECTIONAL FLOW CONTROL VALVES - ÇEKİLİ HIZ AYAR VALFLERİ




Sipariş Kodu / Order Code

GFCV	014	B	1
Tip / Type	Ebat / Size	Diş Tipi / Thread Type	Yay Kuvveti / Spring Force
GFCV	1/4"	B = BSPP N = NPT U = UNF	1 = 1 Bar 2 = 3 Bar
	3/8"		
	1/2"		
	3/4"		
	1"		
	1 1/4"		
	1 1/2"		

Hidrolik Şema / Hydraulic Circuit




Performans / Performance

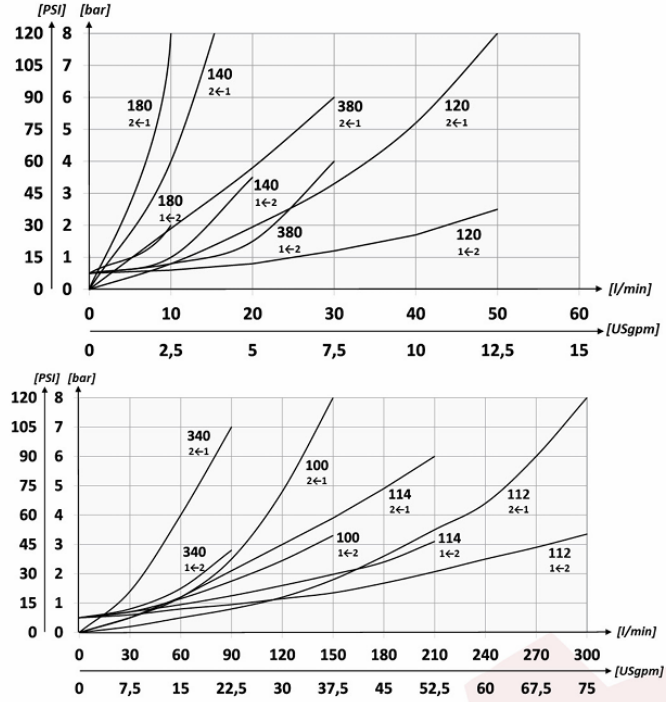

Direkt Hat Üzerine Montaja Uygun / Suitable For Direct In-Line Installation

Gövde Malzemesi - Body Material	Çelik / Steel DIN1.0715
Mineral Yağ - Mineral Oil	ISO 6743/4 (DIN 51524)
Yağ Viskozitesi - Oil Viscosity	10-500 mm ² /s (10 to 420 cSt)
Yağ Sıcaklığı - Oil Temperature	(-20°C +80°C)
Ortam Sıcaklığı - Environment Temperature	(-20°C +50°C)
İç Kaçak - Leakage	0 - 0.25 mm ³ /min

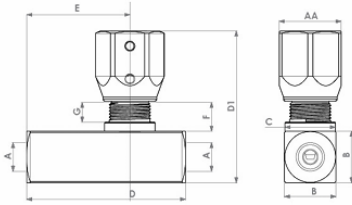

Teknik Özellikler / Technical Specifications

S.N.	Tip / Type	A	Q max (l/min)	P max (Bar)	AA (mm)	B (mm)	C (mm)	D (mm)	D1 (mm)	E (mm)	F (mm)	G (mm)	Ağırlık / Weight (kg)
1	GFCV014B1	BSPP 1/4	15	400	30	25	24,5	66	74	40	14	9,5	0,4
2	GFCV038B1	BSPP 3/8	30	400	30	25	24,5	77	74	51	14	9,5	0,43
3	GFCV012B1	BSPP 1/2	50	300	30	30	29,5	91	80	59	14	9,5	0,67
4	GFCV034B1	BSPP 3/4	80	300	36	40	39,5	112,5	109	72	23,5	16	1,3
5	GFCV100B1	BSPP 1	150	300	36	45	39,5	141	114	90	23,5	16	2,05
6	GFCV114B1	BSPP 1 1/4	200	250	40	55	49	155	136	104	23,5	13	3,32
7	GFCV112B1	BSPP 1 1/2	300	200	40	65	49	168	146	117	23,5	13	4,7