


GFV BIDIRECTIONAL FLOW CONTROL VALVES - ÇEKSİZ HIZ AYAR VALFLERİ



Sipariş Kodu / Order Code


GFV	014	B
Tip / Type	Ebat / Size	Dış Tipli / Thread Type
GFV	1/4"	B = BSPP N = NPT U = UNF
	3/8"	
	1/2"	
	3/4"	
	1"	
	1 1/4"	
	1 1/2"	

Hidrolik Şema / Hydraulic Circuit





Direkt Hat Üzerine Montaja Uygun / Suitable For Direct In-Line Installation

Gövde Malzemesi - Body Material	Çelik / Steel DIN1.0715
Mineral Yağ - Mineral Oil	ISO 6743/4 (DIN 51524)
Yağ Viskozitesi - Oil Viscosity	10-500 mm ² /s (10 to 420 cSt)
Yağ Sıcaklığı - Oil Temperature	(-20°C +80°C)
Ortam Sıcaklığı - Environment Temperature	(-20°C +50°C)
İç Kaçak - Leakage	0 - 0.25 mm ³ /min



Performans / Performance

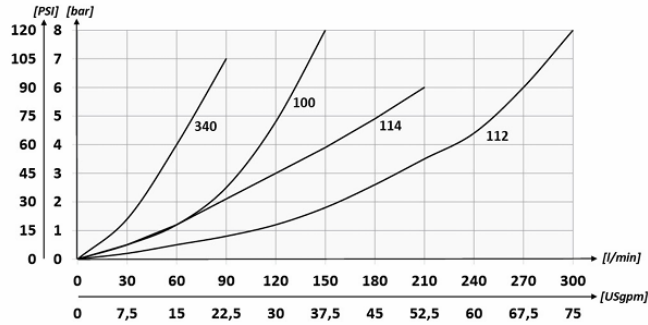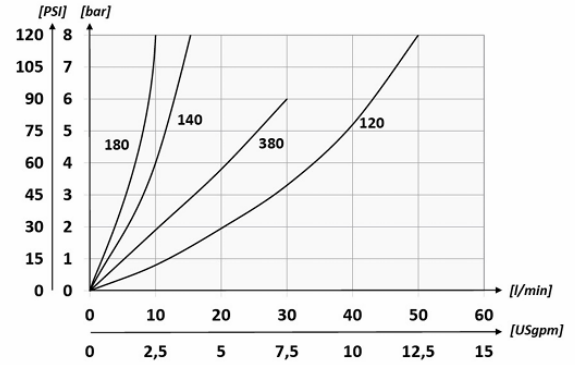

Teknik Özellikler / Technical Specifications

S.N.	Tip / Type	A	Q max (l/min)	P max (Bar)	AA (mm)	B (mm)	C (mm)	D (mm)	D1 (mm)	F (mm)	G (mm)	Ağırlık / Weight (kg)
1	GFV014B	BSPP 1/4	15	400	30	25	24,5	54	74	14	9,5	0,35
2	GFV038B	BSPP 3/8	30	400	30	25	24,5	54	74	14	9,5	0,33
3	GFV012B	BSPP 1/2	50	300	30	30	29,5	64	80	14	10,5	0,5
4	GFV034B	BSPP 3/4	80	300	36	40	39,5	80	109	23,5	16	1,15
5	GFV100B	BSPP 1	150	300	36	45	39,5	101	114	23,5	16	1,56
6	GFV114B	BSPP 1 1/4	200	250	40	55	49	101	136	23,5	13	2,42
7	GFV112B	BSPP 1 1/2	300	200	40	65	49	101	146	23,5	13	3,07